

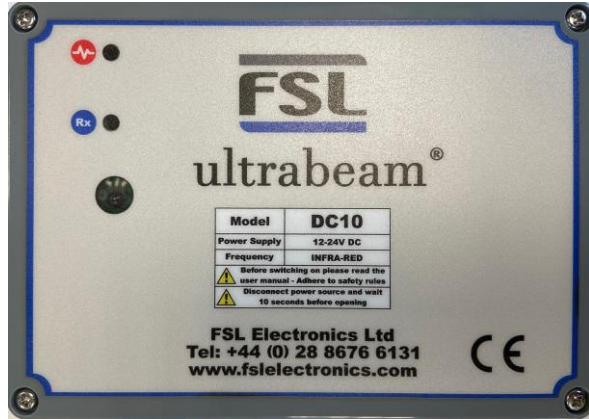


## MiniGrip InfraRed Remote Control

	<p>System Part Number: <b>UBIR-MG-10</b></p> <p>InfraRed Remote Control System consisting of MiniGrip IR Transmitter &amp; DC10 IR Receiver Unit with N/O Momentary Relay Outputs.</p>
---	--

Standard System Package: (customised label options available for MiniGrip Transmitter to include button functions and company logo)

1 x UBIR-MG-10 includes:

<p><b>UB/MG/IR/TX01</b></p> 	<p><b>UB/RX/DC10/IR01</b></p> 
--	---

Part Numbers:

<b><u>UBIR-MG-10</u></b>	<b>MiniGrip IR Remote Control System</b>	
<b><u>UB/MG/IR/TX01</u></b>	<b>MiniGrip IR Transmitter</b>	
<b><u>UB/RX/DC10/IR01</u></b>	<b>DC10 IR Receiver Unit</b>	

Optional Accessories:

<b><u>PA08/MG/002</u></b>	<b>Belt Clip for MiniGrip Transmitter</b>	
<b><u>PA08/MG/003</u></b>	<b>Wall Holder for MiniGrip Transmitter</b>	

## Technical Specifications

### MiniGrip IR Transmitter

Number of buttons:	7
Battery type:	2 x AAA
Dimensions:	145 x 65 x 30mm
Weight:	150g
IP Protection rating:	IP55
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	N/A
Operating distance range:	Up to 30 metres line-of-sight
Operating InfraRed frequency band:	36KHz PWM InfraRed

### DC10 IR Receiver Unit

Power supply:	12-24 VDC
Outputs:	10
Max voltage to contacts:	12A @ 250VAC & 24VDC
Dimensions:	201.0 x 122.4 x 55.0mm
IP protection rating:	IP65
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	N/A
Operating InfraRed frequency band:	36KHz PWM InfraRed

