
ProGrip18 Radio Remote Control



Standard System Package: (Customised label options available for ProGrip Transmitter to include button functions and company logo. Protective Bumper can also be supplied in Yellow, Green or Grey)

1 x UBRF-PG18-26 includes;

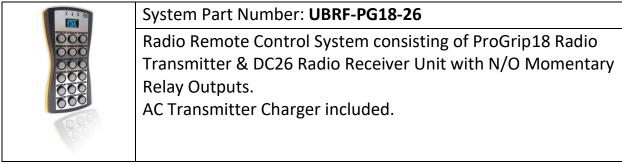

Part Numbers:

UBRF-PG18-26	ProGrip18 Radio Remote Control System	
UB/PRO18/433/TX01	ProGrip18 Radio Transmitter	
PA31/CHARGER/01	AC Transmitter Charger (DC optional)	
UB/RX/DC26/401	DC26 Radio Receiver Unit	
Optional Accessories:		
PA31/CHARGER/02	DC Transmitter Charger	
PA08/BOP/005	Lanyard Loop & Lanyard for ProGrip	
PA08/BOP/006	Universal Belt-Clip for ProGrip	
PA08/BOP/013	Wall Holder for ProGrip	



FSL Electronics Ltd Sandholes Road, Cookstown, Co. Tyrone, BT80 9AR +44 (0)28 867 66131 | info@fslelectronics.com www.fslelectronics.com

Technical Specifications

ProGrip18 Radio Transmitter		
18		
4 x AA (Rechargeable LiPo)		
209.3 x 98.0 x 34.8mm		
320g		
IP65		
-20 °C to +55 °C		
-40 °C to +70 °C		
Internal		
Up to 150 metres		
433.075-434.775MHz		

DC26 Radio Receiver Unit

Power supply:	12-24 VDC	
Outputs:	26	
Max voltage to contacts:	• 18 x General Purpose Relays (5A @24VDC)	
	• 2 x Stop Relays (8A @24VDC)	
	• 6 x General Purpose Relays (12A @24VDC)	
Dimensions:	252.0 x 147.4 x 55.0mm	
IP protection rating:	IP65	
Operating temperature:	-20 °C to +55 °C	
Transport/storage temperature:	-40 °C to +70 °C	
Antenna:	External Antenna on 3 metre cable (pre-fitted)	
Operating radio frequency band:	433.075-434.775MHz	





FSL Electronics Ltd Sandholes Road, Cookstown, Co. Tyrone, BT80 9AR +44 (0)28 867 66131 | info@fslelectronics.com www.fslelectronics.com