





ProGrip8 InfraRed Remote Control

	<p>System Part Number: UBIR-PG8-10</p> <p>InfraRed Remote Control System consisting of ProGrip8 IR Transmitter & DC10 IR Receiver Unit with N/O Momentary Relay Outputs. AC Transmitter Charger included.</p>
---	--

Standard System Package: (Customised label options available for ProGrip8 Transmitter to include button functions and company logo. Protective Bumper can also be supplied in Yellow, Green or Grey)

1 x UBIR-PG8-10 includes:


<p>UB/PRO8/IR/TX</p> 	<p>UB/RX/DC10/IR01</p> 	<p>PA31/CHARGER/01</p> 
--	--	--

Part Numbers:

<u>UBIR-PG8-10</u>	ProGrip8 IR Remote Control System	
<u>UB/PRO8/IR/TX</u>	ProGrip8 IR Transmitter	
<u>PA31/CHARGER/01</u>	AC Transmitter Charger (DC optional)	
<u>UB/RX/DC10/IR01</u>	DC10 IR Receiver Unit	

Optional Accessories:

<u>PA31/CHARGER/02</u>	DC Transmitter Charger	
<u>PA08/BOP/005</u>	Lanyard Loop & Lanyard for ProGrip	
<u>PA08/BOP/006</u>	Universal Belt-Clip for ProGrip	
<u>PA08/BOP/013</u>	Wall Holder for ProGrip	

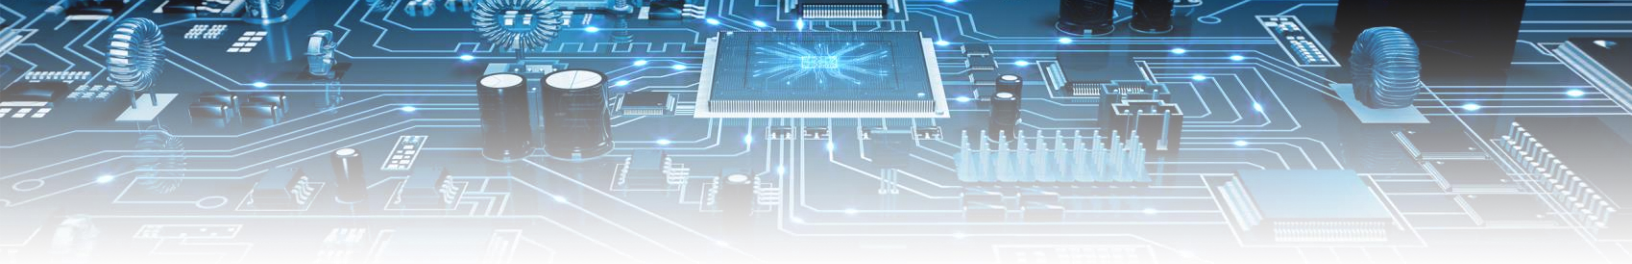

Technical Specifications

ProGrip8 IR Transmitter

Number of buttons:	8
Battery type:	3 x AA (Rechargeable LiPo)
Dimensions:	159.4 x 77.9 x 35.5mm
Weight:	240g
IP Protection rating:	IP65
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	N/A
Operating distance range:	Up to 30 metres line-of-sight
Operating InfraRed frequency band:	36KHz PWM InfraRed

DC10 IR Receiver Unit

Power supply:	12-24 VDC
Outputs:	10
Max voltage to contacts:	12A @ 250VAC & 24VDC
Dimensions:	201.0 x 122.4 x 55.0mm
IP protection rating:	IP65
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	N/A
Operating InfraRed frequency band:	36KHz PWM InfraRed

