MiniGrip Radio Remote Control

	System Part Number: **UBRF-MG-10**
	Radio Remote Control System consisting of MiniGrip Radio Transmitter & DC10 Radio Receiver Unit with N/O Momentary Relay Outputs.

Standard System Package: (customised label options available for MiniGrip Transmitter to include button functions and company logo)

1 x UBRF-MG-10 includes:


UB/MG410	**UB/RX/DC10/401**
	

List Prices (Ex VAT):

UBRF-MG-10	**MiniGrip Radio Remote Control System**	
UB/MG410	**MiniGrip Radio Transmitter**	
UB/RX/DC10/401	**DC4 Radio Receiver Unit**	

Optional Accessories:

PA08/MG/002	**Belt Clip for MiniGrip Transmitter**	
PA08/MG/003	**Wall Holder for MiniGrip Transmitter**	

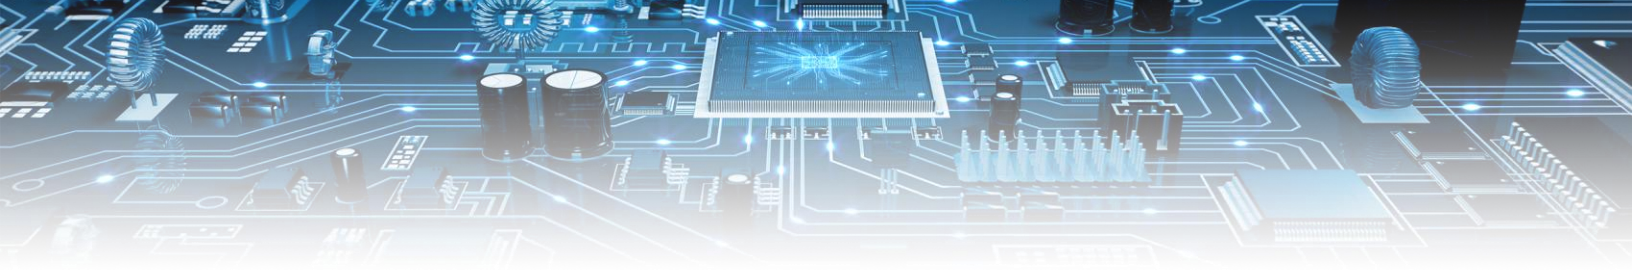

Technical Specifications

MiniGrip Transmitter

Number of buttons:	7
Battery type:	2 x AAA
Dimensions:	145 x 65 x 30mm
Weight:	150g
IP Protection rating:	IP55
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	Internal
Operating distance range:	Up to 150 metres
Operating radio frequency band:	433.075-434.775MHz

DC10 Receiver Unit

Power supply:	12-24 VDC
Outputs:	10
Max voltage to contacts:	12A @ 250VAC & 24VDC
Dimensions:	201.0 x 122.4 x 55.0mm
IP protection rating:	IP65
Operating temperature:	-20 °C to +55 °C
Transport/storage temperature:	-40 °C to +70 °C
Antenna:	External Antenna on 3 metre cable (pre-fitted)
Operating radio frequency band:	433.075-434.775MHz



FSL Electronics Ltd
Unit 9 Kilcronagh Business Park, Cookstown BT80 9HJ
+44 (0)28 867 66131 | info@fslelectronics.com
FSLELECTRONICS.COM